



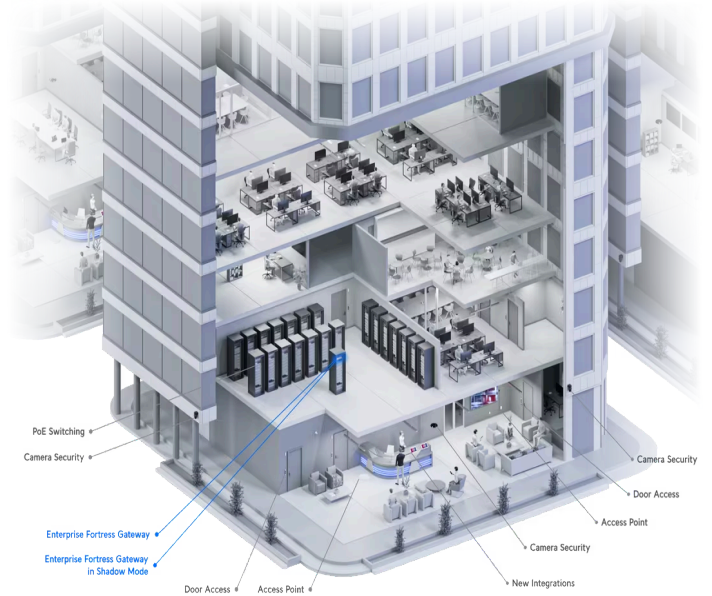

# Enterprise Fortress Gateway (EFG)

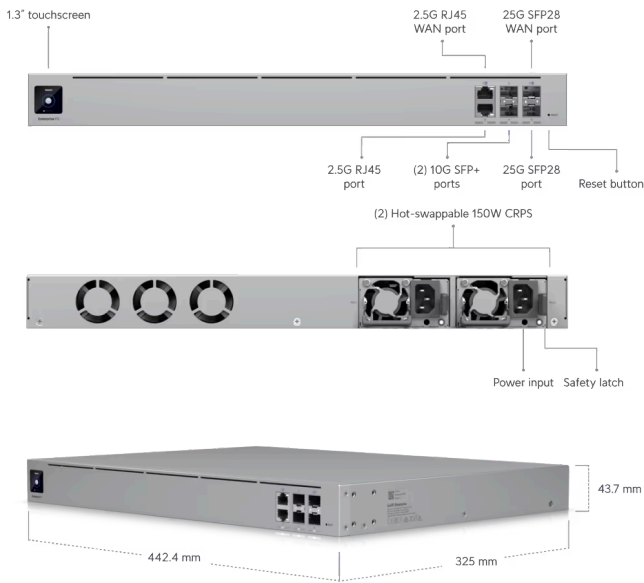

## MECHANICAL

<b>Dimensions</b>	442.4 x 43.7 x 325 mm (17.4 x 1.7 x 12.8")
<b>Weight</b>	6.5 kg (14.3 lb)
<b>Enclosure material</b>	Aluminium CNC, SGCC steel

## HARDWARE

<b>Processor</b>	18-core ARM® v8.2 at 2 GHz
<b>System memory</b>	16 GB DDR4 DIMM
<b>Management interface</b>	Ethernet Bluetooth
<b>Networking interface</b>	LAN: (1) 25G SFP28 port (2) 10G SFP28+ ports (1) 2.5G RJ45 port WAN:(1) 25G SFP28 port (1) 2.5G RJ45 port
<b>Power method</b>	(1) Universal AC input, 100—240V AC, 7A Max., 50/60 Hz
<b>Power supply</b>	(2) Hot-swappable 150W CRPS
<b>Supported voltage range</b>	100—240V AC
<b>Max. power consumption</b>	82W
<b>ESD/EMP protection</b>	Air: ± 8kV, contact: ± 4kV
<b>LCM display</b>	(1) 1.3" touchscreen
<b>Button</b>	Factory reset
<b>Ambient operating temperature</b>	0 to 40° C (22 to 104° F)
<b>Ambient operating humidity</b>	5 to 95% noncondensing
<b>Certifications</b>	CE, FCC, IC

## LEDs

<b>Ethernet</b>	White: Link/activity
<b>SFP+</b>	White: Link/activity
<b>CRPS</b>	Off: No AC power present Steady white: AC power and DC output active Flashing white: AC power present Steady red: AC power lost/failure events Flashing red: Warning events